POWER PAD

HVAC Pad

Product Information

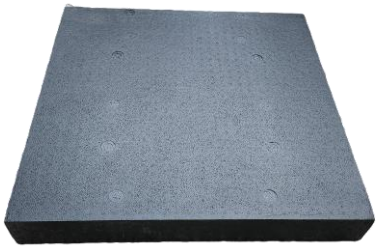

MADE IN USA

Test Description	Result	Test Method
R-Value (Thermal Resistance) per inch (per 25.4 mm)	4.0/inch	ASTM C518
Water Absorption	< 1.0%	ASTM D2842
Compressive Strength @ 10% strain @ 23°C	440 kPa (64 psi)	ASTM D1621 & ASTM C165
Flexural Strength	550 kPa (80 psi)	ASTM C203
Tensile Strength	470 kPa (68 psi)	ASTM D412
Dimensional Stability: Thermal & Humid Aging	< 1.0%	ASTM D2126
Density	48 kg/m³ (3.05 pcf)	ASTM C1622 & ASTM C303 & ASTM D3575
Fungi Resistance	No fungal growth supported	ASTM G21

Learn more online:
pwrpads.com